

Batik Hobo Bag Project

Cutting Diagram and Brief Instructions

www.yoansewingstudio.com

www.youtube.com/yoansewingstudio



Supplies

Fabric A : 1/4 yard

Fabric B : 3/8 yard

Fabric C : 1/4 yard

Lining Fabric : 5/6 yard

Handles Fabric 1/4" yard

**yardage requirements based on 44" wide standard cotton quilting fabric*

3/4" wide elastic (20" long)

Safety pin

Basic sewing notions

Seam Allowances are 1/4" and 3/8".

(please refer to the video instructions carefully)

Finished bag measurements : Approx. 16" x 13" x 7"



A



B



C



Lining
Fabric






Handles
Fabric

Watch the video tutorial : <https://youtu.be/7alCYzRvazc>


Cutting

From Fabric A & C cut one each 40" x 8 1/2"

From B cut one 40" x 13"

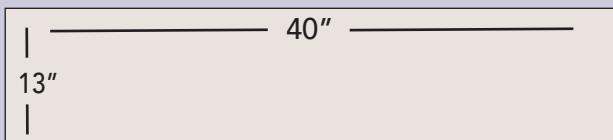

From the lining fabric cut one 40" x 29"

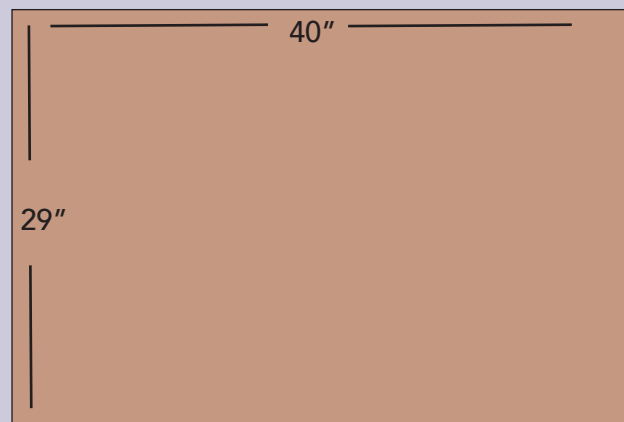

Cut (2) 4" wide strips from the width of the fabric for the handles (approx 42" long) ; trim the selvage ends.




Directions

(These are brief instructions, please refer to the video tutorial for detailed demonstration)


1. Following the below diagram, sew fabric A,B,and C together with 1/4" of seam allowance, press.



2. Lay the lining fabric and the exterior fabric right sides together, sew with 3/8" seam allowance leaving about 5" opening at one of the short side.

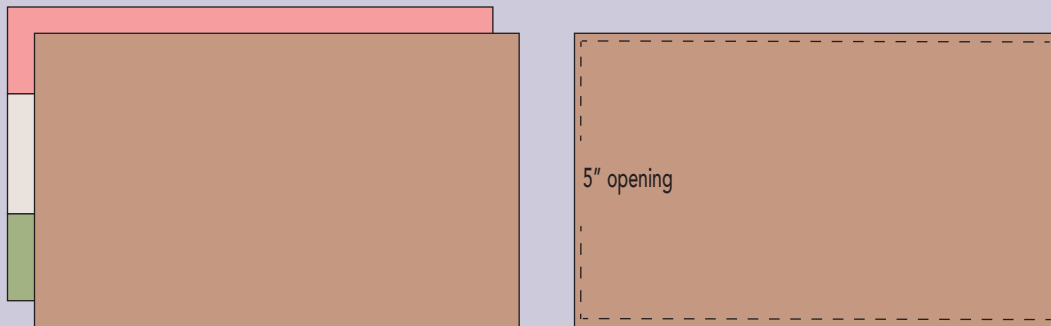


3. Make a 1" opening on all four corners of the short sides by unpicking few stitches (refer to the below picture)

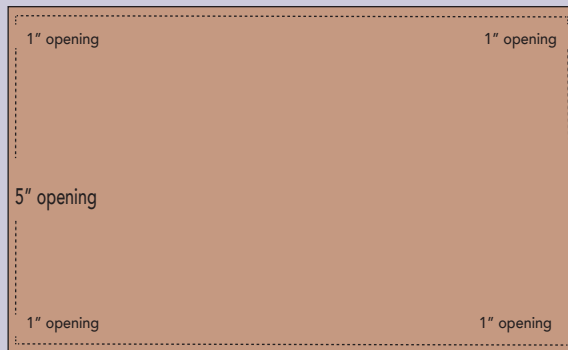


Watch the video tutorial : <https://youtu.be/7alCYzRvazc>

4. Turn the fabric inside out through the 5" opening
5. Top Stitch along the long sides.
6. Make the elastic casing by sewing 1" down from the top stitching line of both of the long sides

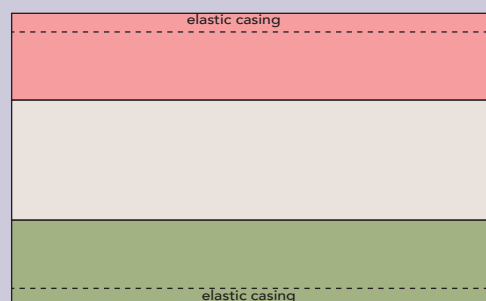

7. Measure 5 1/2" from the side edge of the elastic casing, draw a line to mark it (see the below picture).
Do the same to all 4 sides, for the placement of the elastic.

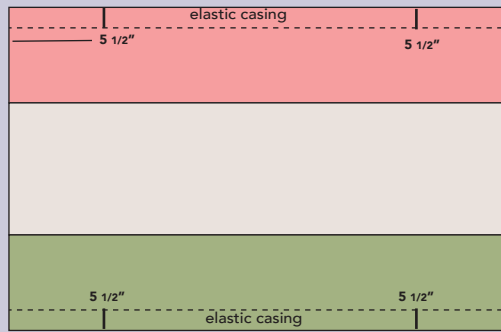

8. Fold the elastic in half and cut (you should end up with 2x 10" long elastic)
9. With the help of the safety pin, install each elastic to each elastic casing (follow the video demonstration)
10. Top stitch the short sides (this will automatically close all the openings).
11. To make the casing of the handles, fold the short sides towards the lining (about 2" wide),
sew following the top stitching line.
12. Sew the handles.
13. With the help of the safety pin, insert each handle into each of the handle casing.
14. Hold both ends of the handle, gather the fabric to the center of the handle.
Repeat the same to the other handle.
15. Make a knot to secure the handle in place. Repeat the same to the other handle.
16. Your bag is done! Enjoy!

Watch the video tutorial : <https://youtu.be/7alCYzRvazc>