

# Fuzzy Wristlet Clutch Project

by Yoan Zivkovic - Yoan Sewing Studio

[www.yoansewingstudio.com](http://www.yoansewingstudio.com)

[www.youtube.com/yoansewingstudio](http://www.youtube.com/yoansewingstudio)

©Copyright 2021 Yoan Sewing Studio



Finished measurements : Approx. 9" x 7" (23 x 17.8 cm)

## Supplies

Fabric 1 : 1/4 yard of minky luxe fabric <https://tidd.ly/3vW4Hj2>

alternative fabric choice : faux fur, sherpa, cork, canvas, linen, home decor, denim, cotton quilting fabric.

Fabric 2 : 1/4 yard of cotton quilting fabric

Note : yardage requirements are an estimate

1/4 yard fusible woven interfacing - Pellon SF 101 (20" wide) <https://amzn.to/346atRJ>

9" (23 cm) metal zipper <https://tidd.ly/2Y35xhs>

1/2" (12mm) swivel hook <https://amzn.to/3CJ2GcJ>

1/4" basting tape <https://amzn.to/3xKhpBH>

Abbreviation

FWI : Fusible woven interfacing



fabric 1

fabric 2



FWI

## Tools

Basic sewing notions

Polyester thread

Zipper foot

Walking foot


watch the video tutorial  
<https://youtu.be/pOSiS2L1DzM>

## Cutting

### Exterior

Front & Back exterior

From fabric 1 cut (2x) 10" x 7 1/2" (25.5 x 19 cm)



exterior panels

### Interior

#### Interior (back)

Panel A (card pockets)

From fabric 2 cut one 8" x 16" (20.3 x 40.6 cm)


From FWI cut one 7" x 16" (17.8 x 40.6 cm)

Panel B

From fabric 2 cut two 5" x 1 1/2" (12.7 x 3.8 cm)

Panel C

From fabric 2 cut two 10" x 1 3/4" (25.5 x 4.4 cm)



panel A



panel B



panel C

#### Interior (front)

Panel D (slip pockets)

From fabric 2 cut two 10" x 5 1/2" (25.5 x 14 cm)

Panel E

From fabric 2 cut one 10" x 7 1/2" (25.5 x 19 cm)



panel D



panel E

### Strap

Wristlet strap

From fabric 1 cut one 13" x 2" (33 x 5 cm)



wristlet strap

©Copyright 2021 Yoan Sewing Studio

Page 1

## Preparation


1. Apply FWI (according to the manufacturer's instructions) on the wrong side of panel A

## Directions

(below are brief instructions please refer to the video tutorial for detailed demonstration)

Seam allowances may vary between 1/2", 1/4", and 1/8", please pay close attention to the instructions given in the video.


1. Following the below diagram, draw the fold lines on the wrong side of Panel A (card pocket panel).

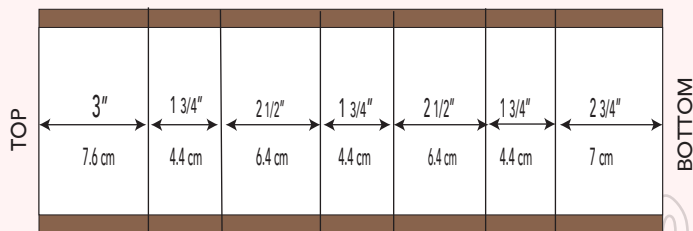

2. Fold and press the card pocket. Following the video tutorial [https://youtu.be/5IX-aWoq\\_OQ?t=616](https://youtu.be/5IX-aWoq_OQ?t=616)

3. Top stitch the pleat lines, then sew the center, and the sides to hold the pleats.


4. Trim the bottom of the card panel to measure 5" (12.7) tall



watch the video tutorial  
<https://youtu.be/pOSiS2L1DzM>

5. Sew panel B to the sides of the card pocket panel with 1/4" (6mm) of seam allowance, press towards the panel B.

6. Sew panel C to the top and bottom of the card pocket panel with 1/4" (6mm) of seam allowance, press towards panel C.

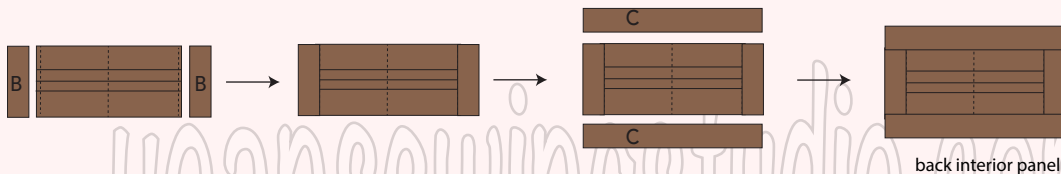

7. Sew and install the interior slip pockets

8. Sew the wristlet strap

9. Install the zipper closure.

10. Assemble the clutch with 1/2" seam allowance. Remember to leave an opening at the bottom of the bag interior.

11. Turn the clutch inside out, sew to close the opening, attach the strap, and your clutch is done.

*You may sell the clutch that you make from this pattern given that it's a home based business.*

## Notes :

1. For the clutch interior, please follow the instructions of Mini Crossbody Bag 2 video : [https://youtu.be/5IX-aWoq\\_OQ?t=616](https://youtu.be/5IX-aWoq_OQ?t=616)

2. You may add RFID blocking fabric, cut 2x panels 10" x 7 1/2", then attach to the wrong side of the interior panels after sewing all the pockets (baste stitch with 1/8" seam allowance).