

# Mini Crossbody Bag 2 Project

by Yoan Zivkovic - Yoan Sewing Studio

[www.yoansewingstudio.com](http://www.yoansewingstudio.com)

[www.youtube.com/yoansewingstudio](http://www.youtube.com/yoansewingstudio)

©Copyright 2021 Yoan Sewing Studio



Finished bag measurements : Approx. 9" x 7" x 1" (23 x 17.8 x 2.5 cm)

## Supplies

Fabric 1 : 3/8 yard of cotton quilting fabric

Fabric 2 : 1/2 yard of cotton quilting fabric

Fabric 3 : 1/8 yard of vinyl/ faux leather fabric

\*yardage requirements are based on 44" wide fabric

\*recommended fabric : cotton quilting, canvas, linen, light denim

Abbreviation :

FF : Fusible Fleece

FWI : Fusible woven interfacing

18" x 6 1/2" Fusible Fleece (I used Pellon TP971F) <https://amzn.to/2Zj8wQu>

1/2 yard fusible woven interfacing - Pellon SF 101 (20" wide) <https://amzn.to/346atRJ>

(3) all purpose zipper (1" wide) at least 10" (25.5 cm) long

1 set of magnetic snap closure <https://amzn.to/3n2IEDm>


(2) 1" d-rings <https://amzn.to/3wxusog>

(2) 1" swivel hooks <https://amzn.to/3k8AWaL>

(1) 1" adjuster slider <https://amzn.to/3ht9Ucv>

(3) sets of rivet medium size; I used 5/16 (8mm) <https://amzn.to/3i2pGu6>

1/4" basting tape <https://amzn.to/3xKhpBH>



## Tools

Basic sewing notions

Polyester thread

Zipper foot

Walking foot

Leather hole puncher

Watch the video tutorial :

[https://youtu.be/5IX-aWoq\\_0Q](https://youtu.be/5IX-aWoq_0Q)

## Cutting


### Bag Exterior

#### Front

##### Panel 1

From fabric 1 cut one 10" x 1 1/2" (25.5 x 3.8 cm)


From FWI cut one 9" x 1 1/2" (23 x 3.8 cm)



##### Panel 2

From fabric 1 cut one 10" x 1 1/2" (25.5 x 3.8 cm)

From FWI cut one 9" x 1 1/2" (23 x 3.8 cm)



##### Panel 3


From fabric 1 cut one 10" x 5" (25.5 x 12.7 cm)

From FWI cut one 9" x 5" (23 x 12.7 cm)



##### Panel 4

From fabric 2 cut one 10" x 9" (25.5 x 23 cm)



##### Panel 5


From fabric 2 cut one 10" x 6 1/2" (25.5 x 16.5 cm)



##### Panel 6

From fabric 2 cut one 10" x 7 1/2" (25.5 x 19 cm)

From FF cut one 9" x 6 1/2" (23 x 16.5 cm)



Zipper Tabs (for front pocket) : From fabric 1 cut four 2 1/2" x 1 1/2" (6.5 x 3.8 cm)

Zipper Tabs (for bag closure) : From fabric 1 cut two 1 1/2" x 1 1/2" (3.8 x 3.8 cm)

©Copyright 2021 Yoan Sewing Studio

Page 1

## Back

### Panel 7

From fabric 1 cut one 10" x 7 1/2" (25.5 x 19 cm)


From FF cut one 9" x 6 1/2" (23 x 16.5 cm)

From FWI cut one 9" x 1/2" (23 x 1.2 cm)


\*FWI to be fused on the top edge of panel 7 (wrong side)



panel 7



FF panel 7



FWI panel 7

### Panel 8

From fabric 1 cut one 10" x 5 1/2" (25.5 x 14 cm)

From FWI cut one 9" x 5 1/2" (23 x 14 cm)



panel 8



FWI panel 8



panel 9

### Panel 9

From fabric 2 cut one 10" x 5 1/2" (25.5 x 14 cm)

## Bag Interior

### Interior (back)

#### Panel A (card pockets)

From fabric 1 cut one 8" x 16" (20.3 x 40.6 cm)

From FWI cut one 7" x 16" (17.8 x 40.6 cm)



panel A



FWI panel A



panel B



panel C

#### Panel B


From fabric 2 cut two 5" x 1 1/2" (12.7 x 3.8 cm)

#### Panel C

From fabric 2 cut two 10" x 1 3/4" (25.5 x 4.4 cm)



panel D



panel E

### Interior (front)


#### Panel D (slip pockets)

From fabric 2 cut two 10" x 5 1/2" (25.5 x 14 cm)

#### Panel E

From fabric 2 cut one 10" x 7 1/2" (25.5 x 19 cm)

## Adjustable strap & d-ring tabs



d-ring tabs

### D-ring tabs


From fabric 3 cut two 2 1/2" x 2" (6.5 x 5 cm)



### Strap

From fabric 3 cut one 55" x 2" (140 x 5 cm)

From fabric 1 cut one 55 1/2" x 1 3/4" (141 x 4.5 cm)



adjustable strap

Watch the video tutorial :

[https://youtu.be/5IX-aWoq\\_OQ](https://youtu.be/5IX-aWoq_OQ)

## Preparation

1. Apply FWI (according to the manufacturer's instructions) on the wrong side of the following :

- Panel 1
- Panel 2
- Panel 3
- Panel 7 (top edge)
- Panel 8
- Panel A

2. Apply FF (according to the manufacturer's instructions) on the wrong side of the following :

- Panel 6
- Panel 7

3. Trim the zippers for the front zipper pockets to measure exactly 10" (25.5 cm) long (entire length)

4. Trim the zipper for the zipper closure to measure exactly 9" (23 cm) long (entire length)

Watch the video tutorial :


[https://youtu.be/5IX-aWoq\\_OQ](https://youtu.be/5IX-aWoq_OQ)

## Directions

(These are brief instructions please refer to the video tutorial for detailed demonstration)


Seam allowances may vary between 1/2", 1/4", and 1/8", please pay close attention to the instructions given in the video.

1. Following the video tutorial, install the lower zipper pocket then the upper zipper pocket of the front exterior.
2. Install the male magnetic snap on the right side of panel 9.
3. Sew the back exterior slip pocket.
4. Install the female magnetic snap on the right side of panel 7.
5. Install the back exterior pocket on the right side of panel 7.
6. Draw the fold lines on the wrong side of Panel A (card pocket panel).

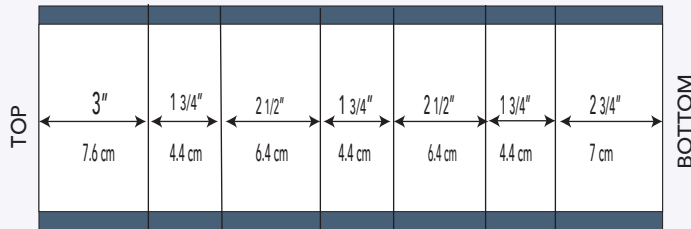


Watch the video tutorial :  
[https://youtu.be/5IX-aWoq\\_OQ](https://youtu.be/5IX-aWoq_OQ)

7. Fold and press the card pocket as per the instructions in the video.
8. Top stitch the pleat lines, then sew the center, and the sides to hold the pleats.
9. Trim the bottom of the card panel to measure 5" (12.7) tall



10. Sew panel B to the sides of the card pocket panel with 1/4" (6mm) of seam allowance, press towards the panel B.
11. Sew panel C to the top and bottom of the card pocket panel with 1/4" (6mm) of seam allowance, press towards panel C.

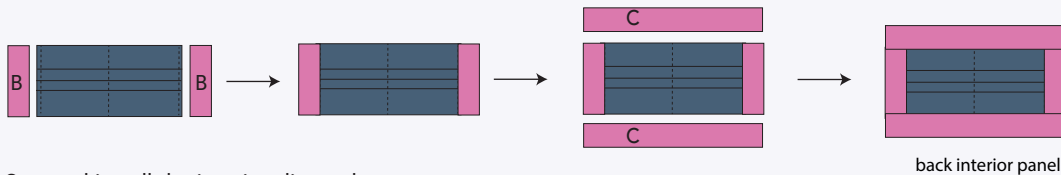

12. Sew and install the interior slip pockets
13. Sew the and install the d-ring tabs.
14. Sew the strap, install the hardware.
15. Install the zipper closure.
16. Assemble the bag with 1/2" seam allowance. Remember to leave an opening at the bottom of the bag interior.
17. Turn the bag inside out, sew to close the opening, attach the strap, and your bag is done.