

# Misty Patchwork Bag Project

by Yoan Zivkovic - Yoan Sewing Studio

[www.yoansewingstudio.com](http://www.yoansewingstudio.com)

[www.youtube.com/yoansewingstudio](http://www.youtube.com/yoansewingstudio)

©Copyright 2021 Yoan Sewing Studio



## Supplies

### Fabric Requirements

12x pcs of 5" squares <https://tidd.ly/3e3xD0I>

1/4 yard faux leather/vinyl fabric <https://amzn.to/3dZFBj>

5/8 yard of cotton quilting fabric (Fabric 1)

1/6 yard of cotton quilting fabric (Fabric 2)

Note: yardage requirements are estimated, based on standard 44" wide cotton quilting fabric  
faux leather fabric based on 54" wide fabric.

10" x 12.5" (61 x 66 cm) midweight interfacing (i used decovil light) <https://tidd.ly/2PZqXb8>

1/4 yard (20" wide) fusible woven interfacing - Pellon SF 101 <https://amzn.to/2N9E1td>

(2) metal zipper 1" (2.5cm) wide, 9" (23 cm) long\* <https://tidd.ly/2VtzeGN>

\*you may also use regular all purpose zipper

(2) 1" (25mm) d-rings <https://amzn.to/3wxusog>

1" (25mm) Adjustable Strap Adjuster <https://amzn.to/3ht9Ucv>

(2) 1" (25mm) swivel hooks <https://amzn.to/3k8AWaL>

(3) sets of rivet ;i used 5/16" (8mm) size <https://amzn.to/3i2pGu6>

Basting Tape <https://amzn.to/3xKhpBH>

## Tools

Basic sewing notions

Walking foot

Hera Marker (optional)

Polyester thread

Note : This post may contain affiliate links; I may earn a small percentage of commission when you make a purchase of qualifying items through any of those links with no additional charge. Thank you for your support!

## Abbreviation


HST : Half square triangle

FWI : Fusible Woven Interfacing


MI : Midweight Interfacing

watch the video tutorial  
<https://youtu.be/phBRaEEW2HY>


Finished bag measurements : 10" x 10" x 3" (25.4 x 25.4 x 7.6 cm)



(12) 5" squares  
you may cut from scraps  
or use charm packs

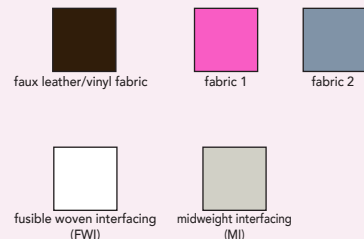

## making the half square triangles (HST)

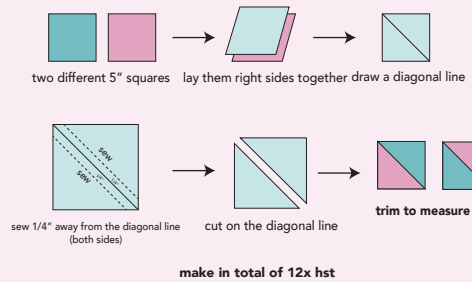

## Cutting

### Front exterior


Panel 1 (upper panel)

Following the diagram, sew 3x HST together with 1/4" of seam allowance

Cut 1x from MI 10" x 3" (25.4 x 7.6 cm)

Cut 2x from FWI 10" x 1/2" (25.4 x 1.2 cm)

\*if opt solid panel : cut a rectangle 11" x 4" (28 x 10.2 cm)

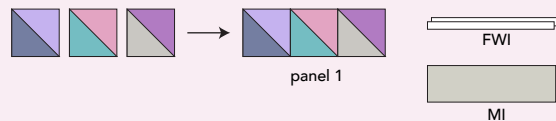

Panel 2 (lower panel)


Sew a patchwork panel (same as panel1)

Cut 1x from the faux leather : 11" x 5 1/2" (28 x 14 cm)

Cut 1x from DL 10" x 3" (25.4 x 7.6 cm)

Cut 2x from FWI 10" x 1/2" (25.4 x 1.2 cm)


\*if opt solid panel : cut a rectangle 11" x 8 1/2" (28 x 21.8 cm)

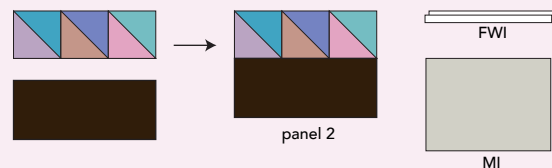

Panel 3 (inner pocket)

Cut 1x from fabric 1 : 11" x 13" (28 x 33 cm)

Zipper tabs : 3" x 1 1/2" (7.6 x 3.8 cm) cut 2x



watch the video tutorial  
<https://youtu.be/phBRaEEW2HY>


## Back exterior

Panel 4

Following the diagram, sew 6x HST together with 1/4" (6mm) of seam allowance

Cut 1x from DL 10" x 6 1/2" (25.4 x 16.5 cm)

Cut 2x from FWI 10" x 1/2" (25.4 x 1.2 cm)

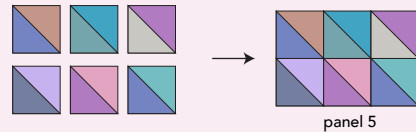

panel 5

Panel 5

Cut 1x from the faux leather fabric : 11" x 6" (28 x 15.2 cm)



back exterior


\*If opt solid panel : cut 1 rectangle 11" x 12 1/2" (28 x 32 cm)

## Bag Interior

Panel 6 (upper panel)

Cut 2x from fabric 2 : 11" x 2" (28 x 5cm)

Cut 2x from FWI : 10" x 2" (25.4 x 5cm)

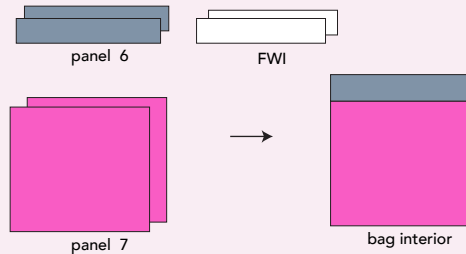

panel 6

FWI

panel 7

bag interior

Panel 7


Cut 2x from fabric 1 : 11" x 11 1/2" (28 x 29.2 cm)

Zipper Panel 1&2

Cut 4x from fabric 2 : 10" x 1 1/2" (25.4 x 3.8 cm)

Cut 2x from FWI : 9" x 1 1/2" (23 x 3.8 cm)

\*fuse the FWI to the wrong side of zipper panel 1

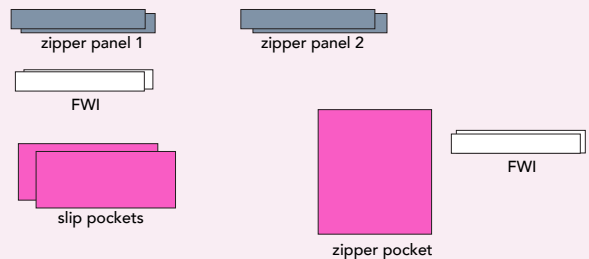

zipper panel 1

zipper panel 2

FWI

slip pockets

zipper pocket

FWI

Slip pockets

Cut 2x from fabric 1 : 11" x 6 1/2" (28 x 16.5 cm)

Zipper pocket

Cut 1x from fabric 1 : 9" x 13" (23 x 33 cm)

FWI : 9" x 2" (23 x 5 cm) cut 2x (to stabilize the zipper template area)

## D-ring tabs & Adjustable Strap

D-ring tabs

cut 2x from the faux leather fabric : 4" x 2" (10 x 5 cm)



d-ring tabs

Strap

Cut from the faux leather fabric : 55" x 2" (140 x 5 cm) strip

Cut from fabric 2 : 55 1/2" x 1 3/4" (141 x 4.5 cm)

watch the video tutorial  
<https://youtu.be/phBRaEEW2HY>

## Interfacing

1. Apply FWI to the wrong side of the following :

Panel 1, Panel 2 (patchwork panel), Panel 4,


Panel 6, Zipper Panel 1, zipper pocket

\*also apply FWI on one of the panel 7 (where the zipper will be sitting) - follow video instruction

2. Apply MI to the following :

Panel 1, Panel 2 (patchwork panel), Panel 6

watch the video tutorial  
<https://youtu.be/phBRaEEW2HY>

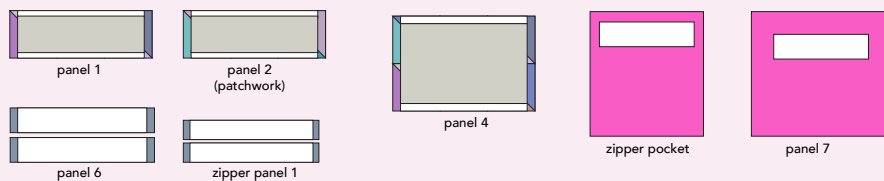

panel 1

panel 2  
(patchwork)

panel 4

panel 6

zipper panel 1

zipper pocket

panel 7

## Directions

(below are brief instructions, please refer to the video tutorial for more detailed demonstrations)

Seam allowances vary in this project. Please pay attention the the directions given in the video tutorial

1. Make in total of 12x HST, trim each block to measure 4" x 4" (10.2 x 10.2 cm)
2. Following the diagram shown in the cutting instructions (refer to page 1 & 2), piece the patchwork panels with 1/4" (6mm) of seam allowance.
3. Make panel 2 by sewing one patchwork panel and the faux leather panel with 1/2" (1.2 cm) seam allowance.
4. Install the front exterior zipper pocket.
5. Sew panel 4 & 5 right sides together with 1/2" (1.2cm) seam allowance, press, then topstitch.
6. Sew and install the interior slip pockets.
7. Sew and install the interior zipper pocket.
8. Sew and install the zipper closure.
9. Assemble the bag interior.
10. Sew and install the d-ring tabs.
11. Sew and install the adjustable strap.
12. Assemble the bag with drop in method. Attach the adjustable strap, and your bag is done.

watch the video tutorial  
<https://youtu.be/phBRaEEW2HY>