

Quilter's "So Organized" Project

Cutting Diagram & Brief Instructions

www.yoansewingstudio.com



Supplies

12 Jelly Roll Strips (2 1/2" fabric strips)
1/4 yard of cotton quilting fabric (Fabric A)
1/2 yard of cotton quilting fabric (Fabric B)
Quilt Batting 18 1/2" x 13 1/2"
1 yard Fusible Woven Interfacing (20" wide)
12" zipper (3x)
22" zipper (1x)
3/4" D - Rings (2x)
3/4" Swivel Hook (2x)
3/4" Adjustable Strap Slider (1x)
Basting Tape
Basic sewing and quilting notions

Additional Tools (used in tutorial)

1/4" Presser Foot
Walking Foot
Hera Marker
Point Turner

Watch the video tutorial : <https://youtu.be/78dpipe7PDc>


Finished bag measurements : 12" x 4.5" x 5.5" (when closed)
Seam allowances are 1/4" unless otherwise stated

Abbreviation:
FWI : Fusible Woven Interfacing
WOF : Width of Fabric

Please refer to the video tutorial for detailed demonstration.



12x Jelly Roll Strips

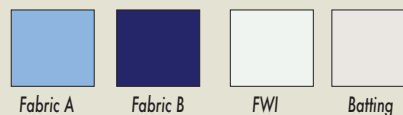

Cutting



Exterior

Lay out 6x Jelly Roll strips as shown below, sew and press towards one side





Watch the video tutorial : <https://youtu.be/78dpipe7PDc>

Cut the Jelly Roll fabric panel following the below diagram

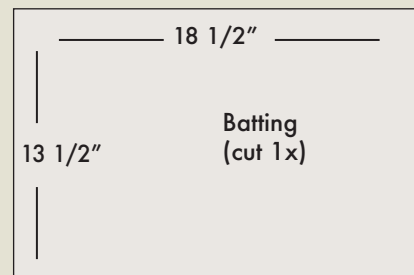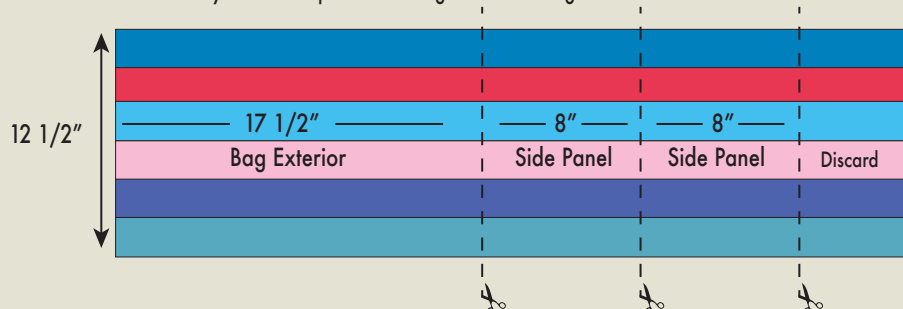



Interior

Layout 6x Jelly Roll strips as shown below, sew and press towards one side

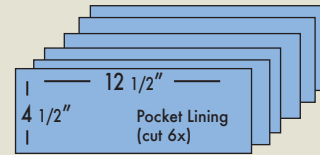

Cut 6x Pocket lining pcs from fabric A (12 1/2" x 4 1/2")

Cut the Jelly Roll fabric panel following the below diagram

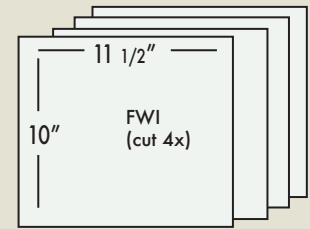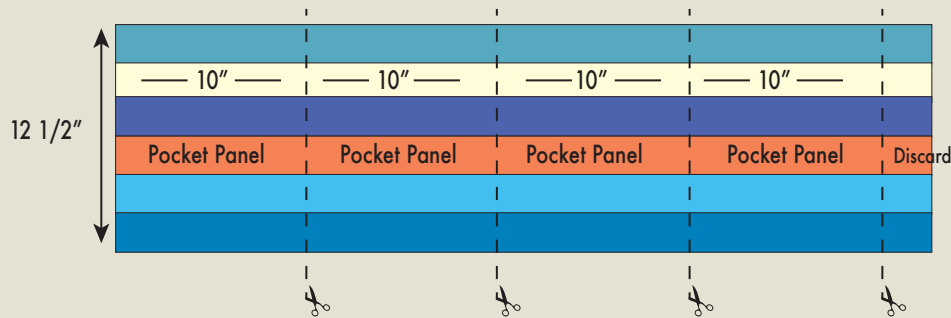

Cut 4x FWI (11 1/2" x 10")


Handles, Strap, Binding



Handles 18" x 3" (cut 2x) from fabric B



FWI 17" x 1 1/2" (cut 2x)



Adjustable Strap 55" x 3" (cut 1x) from fabric B



FWI 54" x 1 1/2" (cut 1x)



Strap Anchors 4" x 3"
(cut 1x) from fabric B



Zipper Tabs 4" x 2 1/2"
(cut 2x) from fabric B



Binding 2 1/2" wide strips (cut 3x WOF) from fabric B

Watch the video tutorial : <https://youtu.be/78dpipa7PDc>

Brief Instructions

Please refer to the video tutorial for detailed demonstrations.

1. Apply FWI to all the pocket panels, handles, and adjustable strap.
2. Install the 12" zippers to the pocket panels.
3. Draw the pocket seam lines as shown in the video tutorial, sew the zipper pockets in place.
4. Sew and attach the side panels to the sides of the zipper pockets.
5. Baste the quilt batting to the wrong side of the bag exterior piece, quilt as desired, trim off excess batting.
6. Lay the bag exterior and the bag interior (with the wrong sides touching each other), baste stitch the long sides with 1/8" seam allowance.
*the exterior fabric might end up, a slight longer than the interior, in that case trim off the excess fabric (the same applied vice versa). Then baste stitch the short sides with 1/8" seam allowance.
7. Use one strip of binding to bind the long sides.
8. Sew and install the handles.
9. Sew and install the strap anchors with the d-rings.
10. Sew and install the hardwares of the adjustable strap.
11. Baste stitch the 22" zipper to the short sides of the bag
12. Bind the zipper tape (thus covering the short sides of the bag, and the strap anchors).
13. Sew the zipper tabs to both ends of the zipper
14. Tuck the ends of the zipper tabs to the bottom center of the side panels.
15. Attach the adjustable strap. Enjoy your new bag!

Watch the video tutorial : <https://youtu.be/78dpipa7PDc>