

Trifold Tea Wallet Project

www.yoansewingstudio.com

www.youtube.com/yoansewingstudio

©Copyright 2021 Yoan Sewing Studio



Supplies and measurements

1x exterior fabric 10 1/2" x 6" (26.7 x 15.2 cm)

1x interior fabric 10 1/2" x 13 1/2" (26.7 x 34.2 cm)

1x batting 11 1/2" x 7" (29.2 x 17.8 cm)

1x fusible woven interfacing 9 1/2" x 12 1/2" (24 x 31.7 cm)

1x 1/4" (6mm) wide elastic 3 1/2" (9cm) long

1x small button 3/4" - 1" (19 - 25 mm) diameter

Basic sewing/quilting notions


Finished wallet measurements :
3 1/2" x 5" (8.9 x 12.7 cm) when folded




exterior



batting



interior



fusible woven interfacing

Notes

-recommended fabric : cotton quilting, canvas, linen,

or any light - medium weight woven fabric

-fusible fleece may be used instead of batting,


cut one the same size as the exterior fabric

Directions

(please refer to the video tutorial for more detailed instructions).

Seam allowances are 3/8" (1 cm) unless otherwise stated.

1. Layer the batting to the wrong side of the exterior fabric, quilt as desired, then trim off any excess batting.
2. Fuse the fusible woven interfacing to the wrong side of the interior fabric (center the position).
3. Rotate your interior fabric to landscape position, then draw the folding lines as shown below.

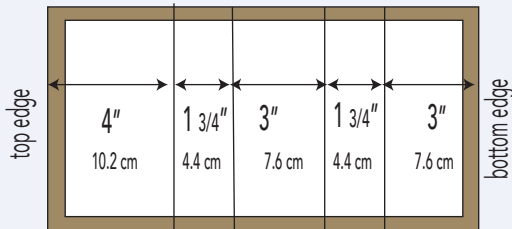

4. Fold and press the folding lines to create two pleats.
5. Topstitch the pleat lines, then baste stitch the short sides with 1/4" (6mm) of seam allowance to hold the pleats together.
6. Measure 3 1/2" (8.9 cm) from the side edges, draw a straight vertical line with your fabric marker, repeat the same to the opposite side.
7. Sew on the dividing lines to create the tea slots. Trim the bottom so that the interior fabric will measure 6" (15.2cm) tall
8. Install the elastic and the button to the right side of the exterior fabric.
9. With the exterior and interior fabrics right sides together, sew all around the perimeter (remember to leave an opening at the bottom).
10. Clip all the corners, turn your fabric right side out through the opening hole.
11. Fold the raw edges of the opening hole towards the wrong side (about 3/8"), clip/pin, or press to hold the fold.
12. Finish the wallet with topstitching.

Watch the full video tutorial
https://youtu.be/f_NtUpK37gk