Zippered ID Wallet Project

designed by Yoan Zivkovic - yoansewingstudio www.yoansewingstudio.com; www.youtube.com/yoansewingstudio Skill level : Advanced beginner

©Copyright 2024 YoanSewingStudio



Supplies

Exterior fabric 1/6 yard (15cm) cotton quilting fabric Lining fabric 1/8 yard (11.5 cm) cotton quilting fabric

*The yardage requirements are estimated based on 44" (112cm) wide cotton quilting fabric.

More fabric may be needed if using directional print.

 $4\,1/2'' \times 3\,1/2''$ (11.5 x 9 cm) clear vinyl (I use gauge 8 vinyl) https://amzn.to/36lXkoA Nylon coil zipper at least 6" (15cm) long, $1\,1/4''$ (32mm) wide; size #5 or #4.5 *I use zipper by the yard

1/2" (12mm) inner measurement d-ring 1/2" (12mm) inner measurement swivel hook 1 set of button snap closure (12.5mm)

1" x 1" (2.5 cm x 2.5cm) fusible stabilizer or midweight interfacing 1/8" or 1/4" basting tape
Fabric glue stick
Polyester thread
Fray check (optional)

Tools

Sewing machine, basic sewing notions Zipper foot, Walking foot, hand sewing needle Finished wallet measurements approx. 4 3/4" wide x 3 1/2" tall 12 x 9 cm

Features Zipper closure ID Window pocket Interior pocket Exterior slip pocket Lanyard Strap

watch the video tutorial https://youtu.be/QhHDQghUoAl

Seam allowances are 3/8" (1cm) unless otherwise stated

Cutting Instructions

Following the below chart, cut your fabric accordingly.

Name	Exterior Fabric	Lining Fabric	Clear Vinyl Fabric
Front Exterior/ ID window	Cut (1) Pattern 1		Cut (1) 4 1/2" w x 3 1/2" h (11.5 x 9 cm)
ID pocket		Cut (2) 5 1/2" w x 4" h (14 x 10 cm)	
Front Interior		Cut (1) 5 1/2" w x 4 1/2" h (14 x 11.5 cm)	
Back Exterior	Cut (1) 5 1/2" w x 4 1/2" h (14 x 11.5 cm)		
Back Exterior Pocket	Cut (1) 5" w x 4 1/2" h (12.7 x 11.5 cm)	Cut (1) 5" w x 4 1/2" h (12.7 x 11.5 cm)	
D-Ring Tab	Cut (1) 2" x 2" (5 x 5 cm)		
Button Flap	Cut (1) 2 1/2" x 4" (6.5 x 10cm)		
Lanyard Strap	Cut (1) 2" x36" (5 x 91.5cm)		



Directions

Seam allowances are 3/8" (1cm) unless otherwise stated.

Please watch the Full Video Tutorial for thorough demonstration.

Front

- 1. Make the ID window
- 2. Finish the raw edges of one of the long side of the front exterior/ld window panel, then install the zipper on the finished edge. Make sure that the start of the zipper is positioned on the left side.
- 3. Sew and install the ID pocket.
- 4. Attach the front interior panel.

D-ring tab, lanyard strap

- 5. Sew the d-ring tab, install it on the left side of the front panel (same side as the start of the zipper).
- 6. Sew the lanyard strap, set aside.

Back

- 7. Sew the back exterior pocket
- 8. Sew the button flap then install it on the right side of the back exterior panel.
- 9. Install the male button on the back exterior pocket
- 10. Sew the back exterior pocket panel to the right side of the back exterior panel.
- 11. Install the female button on the flap.

watch the video tutorial https://youtu.be/QhHDQghUoAl

Assembling the wallet, finishing

- 12. With the right sides facing, sew the front and the back panel together, leave about 3" (7.5cm) of opening at the bottom. Make sure to position the back exterior pocket opening on the same side as the d-ring and the start of the zipper.
- 13. Turn the wallet right side out through the opening hole.
- 14. Fold the raw edges of the opening towards the wrong side about 3/8" (1cm).
- 15. Hand sew the opening hole with slip stitch/ ladder stitch.


NOTES

- As always for best results use a walking presser foot (except when installing zipper)..
- When stitching bulky layer, switch your needle to a larger one (e.g. denim needle size 100/16), and increase the stitch length.
- Always use disappearing fabric marker (air disappearing recommended) when marking on the fabric.
- Watch the full instructions in the video tutorial https://youtu.be/QhHDQghUoAl
- Share the pictures of your finished bag on instagram, tag me or use #yoansewingstudio

Terms of use: You may sell the wallet that you make with this pattern. Permission to sell is given for small scale home based handmade business.

©Copyright 2024 YoanSewingStudio | All Rights Reserved | Duplication of any kind is prohibited

YourSewirgStudio

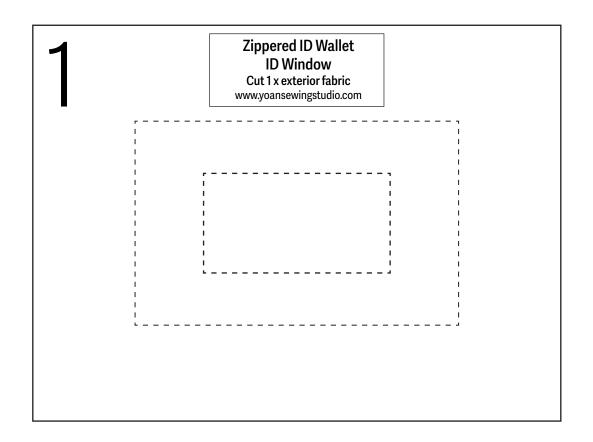

1 inch 2 cm

test squares (test your printer)

Seam allowances are included in this pattern

©Copyright 2024 YoanSewingStudio | All Rights Reserved

